



Rexnord Omega[®] E HSU

Precision. Power. Performance.

You want a trusted name when it comes to providing engineered power transmission products that improve productivity and efficiency. Rexnord provides superior products for your industrial applications world wide. We work closely with you to reduce maintenance costs, eliminate redundant inventories and prevent equipment downtime.

Applications include:

- ▶ pumps
- ▶ industrial fans
- ▶ roller tables

Rexnord Omega[®] E HSU

The Rexnord Omega is a unique general purpose elastomer coupling with split element design providing easy assembly and replace-in-place service. Available in close coupled and spacer designs. These unique designs permits faster installation and reduced inventories by providing multiple distance between shaft ends using the same elements and hubs. Rexnord Omega E design is used on close coupled applications. Rexnord Omega HSU is designed for hot and humid environments



Ex Certified II 2GD c T5

Rexnord Omega® E HSU

Features

- ▶ Split in half element
- ▶ HSU material
- ▶ Interchangeable hubs

Benefits


- ▶ Ease of installation
- ▶ Visual inspection
- ▶ Long life in hot & humid environment
- ▶ Low inventory requirements



E HSU

Finished bore hub

Taper bush hub

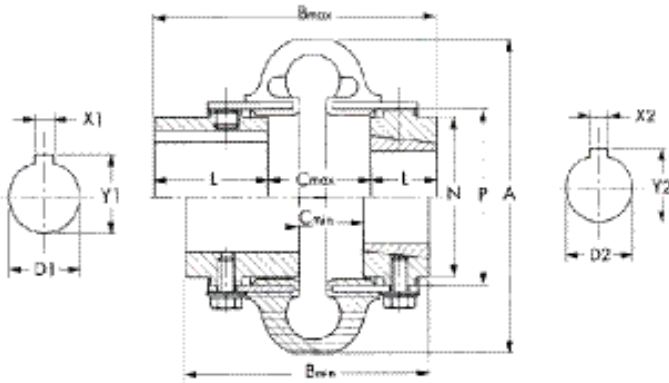

Torque Demands Driven Machine

Typical Application for Electric Motor or Turbine Driven Equipment

Typical Service Factor

	Constant torque such as centrifugal pumps, blowers and compressors	1.0
	Continuous duty with some torque variations including plastic extruders and forced draft fans	1.5
	Light shock loads from metal extruders, cooling towers and log haulers	2.0
	Moderate shock loading as expected from a car dumper, stone crusher, vibrating screen	2.5
	Heavy shock load with some negative torques from reciprocating pumps, compressors, reversing turnout tables	3.0
	Frequent torque reversals such as reciprocating compressors with frequent torque reversals which do not necessarily include reverse rotations	Consult Rexnord Engineering

Size	Tnom Nm	n-max n-min	D1 max mm	Taper bush	D2 max mm	A	B1min FRB	B1max FRB	B2min HTL	B2max HTL	C1min FRB	C1max FRB	C2min HTL	C2max HTL	L FRB	L HTL	N FRB	N HTL	P	J kgm	m kg
E2HSU	22	7 500	28	-	-	89	84	94	-	-	36	46	-	-	24	-	38	-	47	0,00032	0,5
E3HSU	41	7 500	34	1008	25	102	84	122	87	87	8	46	43	43	38	22	50	50	59	0,00032	1,0
E4HSU	62	7 500	42	1008	25	116	84	122	87	87	8	46	43	43	38	22	57	57	66	0,0012	1,3
E5HSU	105	7 500	48	1210	32	137	97	147	103	103	8	59	52	52	44	25	70	71	80	0,0032	2,3
E10HSU	164	7 500	55	1610	42	162	97	147	103	103	8	59	52	52	44	25	84	84	93	0,0064	3,4
E20HSU	260	6 600	60	1610	42	184	113	169	114	114	9	65	64	64	52	25	95	89	114	0,016	6,8
E30HSU	412	5 800	75	2012	50	210	125	185	128	128	7	68	64	64	59	32	114	102	138	0,034	10
E40HSU	622	5 000	85	2517	65	241	135	201	150	150	9	75	60	60	63	45	146	117	168	0,08	17
E50HSU	864	4 200	90	2517	65	279	151	231	165	165	11	91	76	76	70	45	152	124	207	0,158	24
E60HSU	1 412	3 800	105	3020	75	318	173	261	186	186	9	97	84	84	82	51	165	146	222	0,266	34
E70HSU	2 490	3 600	120	3535	90	356	189	279	238	238	19	109	60	60	85	89	175	165	235	0,366	39
E80HSU	4 460	2 000	155	4040	100	406	245	377	299	299	17	149	95	95	114	102	240	194	286	1,054	77
E100HSU	9 600	1 900	171	4545	110	533	324	375	267	267	44	95	38	38	140	114	260	260	359	2,19	95
E120HSU	19 200	1 800	190	5050	125	635	362	429	305	305	57	127	51	51	152	127	299	299	448	2,93	163
E140HSU	38 400	1 500	229	7060	177	762	432	483	381	381	76	127	76	76	178	152	381	381	530	4	280

*Weight and inertia with maximum bore and key way • Dimension C(1) finished bore hubs - C(2) with Taper Bush hubs

REXNORD
PRECISION. POWER. PERFORMANCE.

Rua Chistopher Levalley, 187 - São Leopoldo/RS - CEP: 93037-730
Fone: 51 3579.8081- Fax: 51 3579.8049
www.rexnord.com.br • vendas@rexnord.com.br
Pronto Atendimento Rexnord: 0800-788880

Contact

funcke
ACOPLAMENTOS

Tecfin - Técnica Comercial de Acionamentos Ltda.
Rua Gotemburgo, 380 - São Cristóvão
CEP: 20941-080 - Rio de Janeiro / RJ
Tel.: (21) 2589-2663 | Cel.: (21) 98777-6466
Nextel: (21) 7794-8213 | ID: 101*197276
vendas@funcke.com.br